

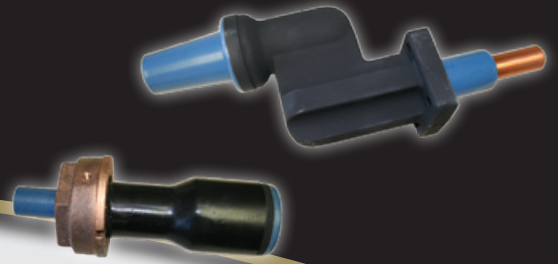




# PATTON & COOKE Adaptor Bushings



Patton & Cooke adaptor bushings allow XLP or EPR cable connection to devices originally designed for use with PILC cable only. Specifically, the Judson Subway Oil-Break Disconnect ("J" Box) can be installed with lead cable for which it was designed or on XLP or EPR cable with the use of Patton & Cooke adaptor bushings. Adaptor bushings are available in straight or offset mounting for rubber elbow installation ease.

Illustration (not to scale)	Description	Patton & Cooke Catalogue No.	Dimensions				Weight	
			a		b		(kg)	(lb)
			(mm)	(in)	(mm)	(in)		
	5 kV, 600 Amp Straight mounting plane	<b>BU-035</b>	373	14.7	376	3.0	2.8	6.3
	5 kV, 600 Amp Offset mounting plane	<b>BU-036</b>	376	14.8	152	6.0	3.0	7.0

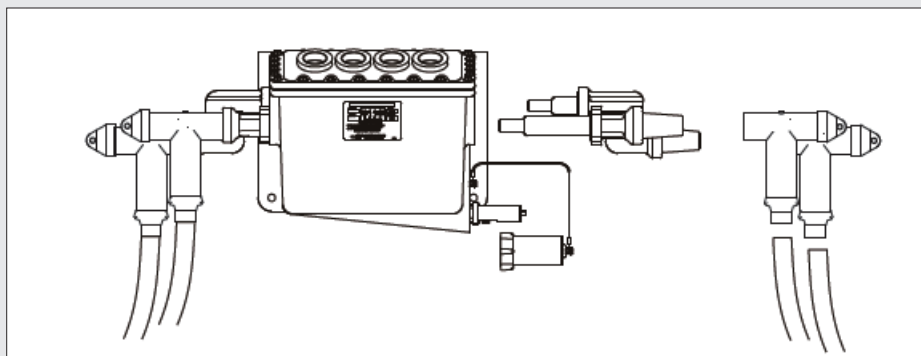


Figure 1: Adaptor bushings shown installed on a "J" Box

#### ORDERING PROCEDURE:

1. Determine the mounting plane, straight or offset, required.
2. Select the catalogue number of the adaptor bushing.



**High Voltage Equipment Solutions. Design and Manufacturing.**

*We make the connection.*