





PATTON & COOKE Braids

Flexible Copper Braid assemblies consist of seamless copper ferrules, pressed onto flexible, braided and tinned copper wires. Flexible braid is an ideal solution for rigid bus application and expansion joints. Normal overall length is 12" but lengths over that will be readily supplied. For custom lengths, and/or other arrangements, please consult the factory.

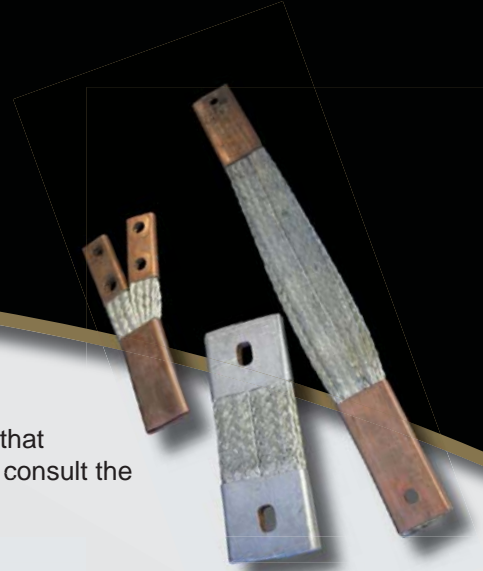

Braid Number	Amp	Ferrule Size
2	430 A	1/4" x 1 1/4"
3	550 A	3/8" x 1 1/4"
4	640 A	1/2" x 1 1/4"
5	720 A	1/2" x 1 3/8"
6	820 A	5/8" x 1 3/8"
7	870 A	5/8" x 1 1/2"
8	920 A	11/16" x 1 5/8"
9	1000 A	11/16" x 1 5/8"

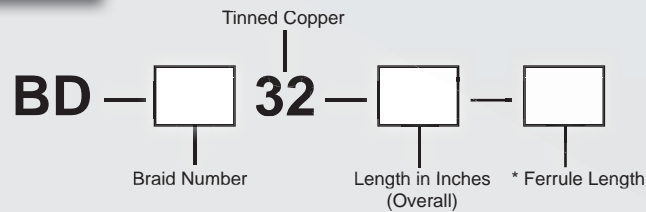

* Ferrule Details		
A	3" Ferrule 2 x 9/16" Holes 1 3/4" Centers	
B	4" Ferrule 2 x 9/16" Holes 1 3/4" Centers	
X	Custom	
1st Ferrule	Ferrule Length _____	Hole Centers _____
2nd Ferrule (Same as first)	Ferrule Length _____	Hole Centers _____
		Hole Diameter _____

*For higher current ratings or other custom braid arrangements, contact factory.



High Voltage Equipment Solutions. Design and Manufacturing.

We make the connection.